

# COMMERCIAL DRYERS



Featuring Factory-Installed Coin Slide and Coin Box



## FOR YOUR CUSTOMERS

- Large Capacity is Ideal for Family-Size Loads
- Increased Capacity Allows Large Loads to Tumble and Spread, Reducing Dry Time
- 3 Cycle Options: Regular/Heavy, Permanent Press and Knits/Delicates
- Easy-to-Follow Console Instructions
- 180° Wide-Opening Side-Swing Door Allows For Convenient Access

## IMPROVED AIRFLOW SYSTEM

- New Blower Housing Wave Insert Increases Air Velocity up to 10%
- Increases Efficiency, Heating Element Lifespan and Improves Fabric Care†



† Results per Whirlpool® dryer testing conducted 07/03 – 08/04.

## CEM2940TQ—29" Electric Dryer CGM2941TQ—29" Gas Dryer

- 7.0 Cu. Ft. Drum Capacity
- Push-Button Controls with Stainless-Look Console
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- 3 Timing Cycles Possible with Included Cams\*
- Large Removable, Door-Mounted Lint Screen
- 180° Wide-Opening Reversible Side-Swing Door
- Powdered Paint Top, Door and Cabinet
- Electric Model Features Element Rated at 5600 Watts, 240-Volt
- Gas Model Features a 22K BTU Burner
- Motor: 1/3-HP with Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element When Motor Stops
- Eight Quarter Coin Slide Capacity, Set Your Dry Price from \$0 to \$2 Per Cycle (\$1 Factory Preset)
- Power Cord Sold Separately (Electric Model Only)
- **90-Day Labor Only/2-Year Limited Parts Only Warranty\*\***

\*45-Minute Timing Cam Installed, 30 and 60 Minute Cams Included.

\*\*Call 1-800-NO-BELTS for warranty details.

## SINGLE OPERATING THERMOSTAT

For simple accurate temperature control.

## LARGE CAPACITY METERCASE

Larger coin box for reduced collections.

# COMMERCIAL DRYERS




## Featuring Factory-Installed Coin Slide and Coin Box

### Whirlpool® Commercial Dryers Factory-Installed Coin Slide and Coin Box

DRYER SPECIFICATIONS		
MODELS	CEM2940TQ <sup>†</sup>	CGM2941TQ <sup>††</sup>
<b>GENERAL INFORMATION</b>		
Stainless steel look push-button console, white enamel drum, powdered paint finish cabinet and top, removable lint filter, improved metercase.	Metercase Model Factory-Installed Coin Slide and Coin Box, \$0-\$2 per Cycle, \$1 Factory Preset	Metercase Model Factory-Installed Coin Slide and Coin Box, \$0-\$2 per Cycle, \$1 Factory Preset
<b>DRUM VOLUME</b>	7.0 Cu. Ft.	7.0 Cu. Ft.
<b>MOTOR</b>	1/3-HP Single-Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating	1/3-HP Single-Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating
<b>ELECTRICAL REQUIREMENTS</b>	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard 30 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)	Nominal 120 Volt, 60 Hz, A.C. Standard 15 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)
<b>HEATER TYPE</b>	Electric	Gas*
<b>HEATER/BURNER RATING</b> (Add 500 Watts Approx. for Motor on all Dryer Models)	Heater Rated at 5600 Watts	22,000 BTU Natural Gas
<b>OPERATIONAL AMPERAGE</b> (Does Not Include Control or Gas Valve)	Motor – 4.0 Amps No Load Heater 23.33 Amps @ 240 Volt, 27.33 Total	Motor – 4.0 Amps No Load
<b>SHIPPING WEIGHT (EST.)</b>	147 Lbs.	147 Lbs.
<b>DIMENSIONS</b>		
Width – in. (cm)	29 (73.7 cm)	29 (73.7 cm)
Depth – in. (cm)	27.75 (70.5 cm)	27.75 (70.5 cm)
Height – in. (cm)	42.875** (108.9 cm)	42.875** (108.9 cm)
*Burner orifices are available for manufactured, natural, mixed and LP gas with varying BTU ratings. ** (height at metercase top) †Power cords on electric models sold separately. ††LP Conversion Kit: 49572. Energy information is available online at <a href="http://www.whirlpoolcommerciallaundry.com/products">www.whirlpoolcommerciallaundry.com/products</a>		



Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

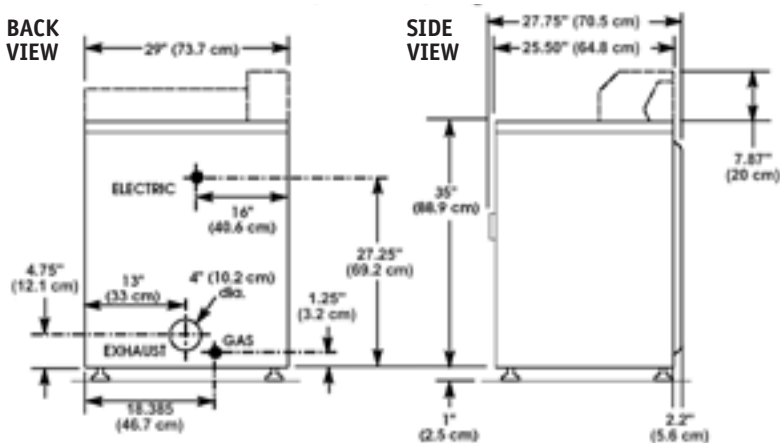


**EXCLUSIVE 90-DAY FACTORY  
LABOR WARRANTY  
DRYER WARRANTY—2-YEAR  
LIMITED (PARTS ONLY)**

For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-NO-BELTS.

#### Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

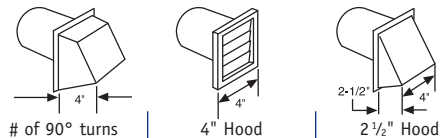

Maximum length of 4" diameter rigid metal duct		
# of 90° turns	4" Hood	2 1/2" Hood
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum length of 4" diameter flexible metal duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.

To Locate a Distributor Near You, Please Visit [www.whirlpoolcommerciallaundry.com/distributor](http://www.whirlpoolcommerciallaundry.com/distributor), or call 1-800-NO-BELTS